
jaquar.com



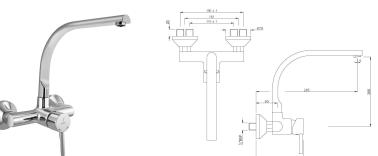

Product Code	FLP-CHR-5165PM
Description	Single Lever Sink Mixer with Swinging Spout on Upper Side, Wall Mounted
Flow Rate	14.22 LPM @ 3 bar
Flow regulator	By using flow regulators (Product should be ordered with suffix as GA-6.0 LPM, GB-8.0 LPM & GD-3.8 LPM @ 3.0 Bar pressure) one can regulate the flow rate.
Recommended Water Pressure	0.5 Bar - 5 Bar
Brass Specification in Percentage	Brass Rod as per IS:319-1989 Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder) Brass Sheets as per IS:410-1977 Cu (61.5-64.5), Pb (0.0-0.3), Fe (0.0-0.075), Total Impurity (0.0-0.6), Zn (Remainder) Brass Pipe as per IS:407-1996 Cu (62.0-65.0), Pb (0.0-0.3), Fe (0.0-0.01), Total Impurity (0.0-0.6), Zn (Remainder)
Cartridge Specification	NSF-61 Approved Cartridge with Temperature Limiter Cartridge with Brass Spindle Life Cycle EN 817: 70,000 cycles (Standard) - 2.1 LAC Cycles as per EN 817* - 10.5 LAC Cycles (ON/OFF)*
Water Tightness	16 bar (Pass)
Pressure Resistance	25 bar (Pass)
Finish	Plating: Nickel-10.0 micron Chromium-0.3 micron Salt Spray (500 hrs + Validated) Adhesion (Pass)
Aerator Size	WRAS, ACS Approved (20X1)
Available Colour Finishing	Black Chrome (BCH) & Black Matt (BLM)
* As per in-house testing	done on automatic life cycle testing machine made by Giussani, Italy
	effort has been made to ensure factual accuracy, the information presented subject to changes ifferent sites, markets and/ or countries. 10% variation in flow rate may be possible. Jaquar

reserves the right to make the necessary amendments at any time without prior notice.